

**2008**

**MIST  
ELIMINATORS**

**EFFECTIVE:** SEPTEMBER 22, 2008

SUBJECT TO CHANGE WITHOUT NOTICE

**FORM:** PPLME-0908

**ORDER POLICY:** \$50.00 MINIMUM

**WARRANTY POLICY:** COMPLETE DETAILS

AVAILABLE AT [WWW.ZEKS.COM/DISTRIBUTOR](http://WWW.ZEKS.COM/DISTRIBUTOR)



1302 Goshen Parkway  
West Chester, PA 19380

610-692-9100

800-888-2323

610-692-9192 Fax

[www.zeks.com](http://www.zeks.com)

# **MIST ELIMINATORS**

## **DEPTH BED FILTRATION**

---

**FLOW RANGE 125 - 8000 SCFM**

# ZEKS MIST ELIMINATORS

## DOWN TO .01 MICRON REMOVAL

### 1 MICRON COALESCING

Model Number	Capacity scfm	Connection Size	Shipping Weight lbs.	Price
125HDF	125	2" MPT	455	\$ 3,287
250HDF	250	2" MPT	455	\$ 3,526
500HDF	500	3" MPT	520	\$ 4,207
800HDF	800	3" MPT	530	\$ 5,442
1100HDF	1100	3" MPT	660	\$ 6,230
1500HDF	1500	4" FLG	775	\$ 7,499
1900HDF	1900	4" FLG	1225	\$ 9,615
2400HDF	2400	4" FLG	1245	\$ 10,303
3000HDF	3000	4" FLG	1385	\$ 11,872
4500HDF	4500	6" FLG	1770	\$ 15,225
6000HDF	6000	8" FLG	2460	\$ 21,594
8000HDF	8000	8" FLG	2850	\$ 24,679

Replacement Element			
Model Number	Shipping Weight lbs.	Price	Gortex Material (698738)
M125	20	\$ 907	80 inches
M250	25	\$ 996	80 inches
M500	35	\$ 1,187	80 inches
M800	60	\$ 1,559	80 inches
M1100	70	\$ 1,816	90 inches
M1500	100	\$ 2,278	95 inches
M1900	120	\$ 2,632	120 inches
M2400	140	\$ 3,276	120 inches
M3000	160	\$ 3,744	120 inches
M4500	250	\$ 7,490	120 inches
M6000	350	\$ 9,365	150 inches
M8000	375	\$ 10,267	150 inches

**NOTES:** Ratings are based on 100°F and 100 PSIG inlet conditions.

Each Mist Eliminator contains one element and one Delta P gauge.

Maximum working pressure is 150 PSIG. Consult factory for other pressures.


Consult factory for quantity discounts on element orders of 5 (five) or more.

Drains are optional on all models.

Recommend replacing gortex gasket material when changing element.

Replacement Delta P Gauge - 633352

MODEL NUMBER	Conn. Size (A)(B)	Drain Size (C) FPT	DIMENSIONS Inches			
			(D)	(E)	(F)	(G)
125HDF	2" MPT	1"	14	14.5	42.3	13
250HDF	2" MPT	1"	14	14.4	42.3	13
500HDF	3" MPT	1"	14	14.4	68.3	13
800HDF	3" MPT	1"	14	14.5	68.3	13
1100HDF	3" MPT	1"	16	15.5	72.3	14
1500HDF	4" FLG	1"	18	15.6	72.4	15
1900HDF	4" FLG	1"	24	16.9	75.8	18
2400HDF	4" FLG	1"	24	16.9	75.8	18
3000HDF	4" FLG	1"	24	16.9	88.8	18
4500HDF	6" FLG	1.5" FLG	24	18.0	153.0	18
6000HDF	8" FLG	2" FLG	30	18.0	155.0	21
8000HDF	8" FLG	2" FLG	30	19.0	181.0	21

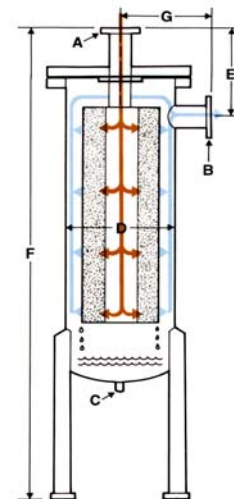

**NOTES:** Consult factory for application assistance when inlet temperature exceeds 120°F.

Maximum operating temperature of housing is 300°F.

Coalescing efficiency is reduced as temperature rises.